


Σ Data-7200

Blazing A Trail Into The Future

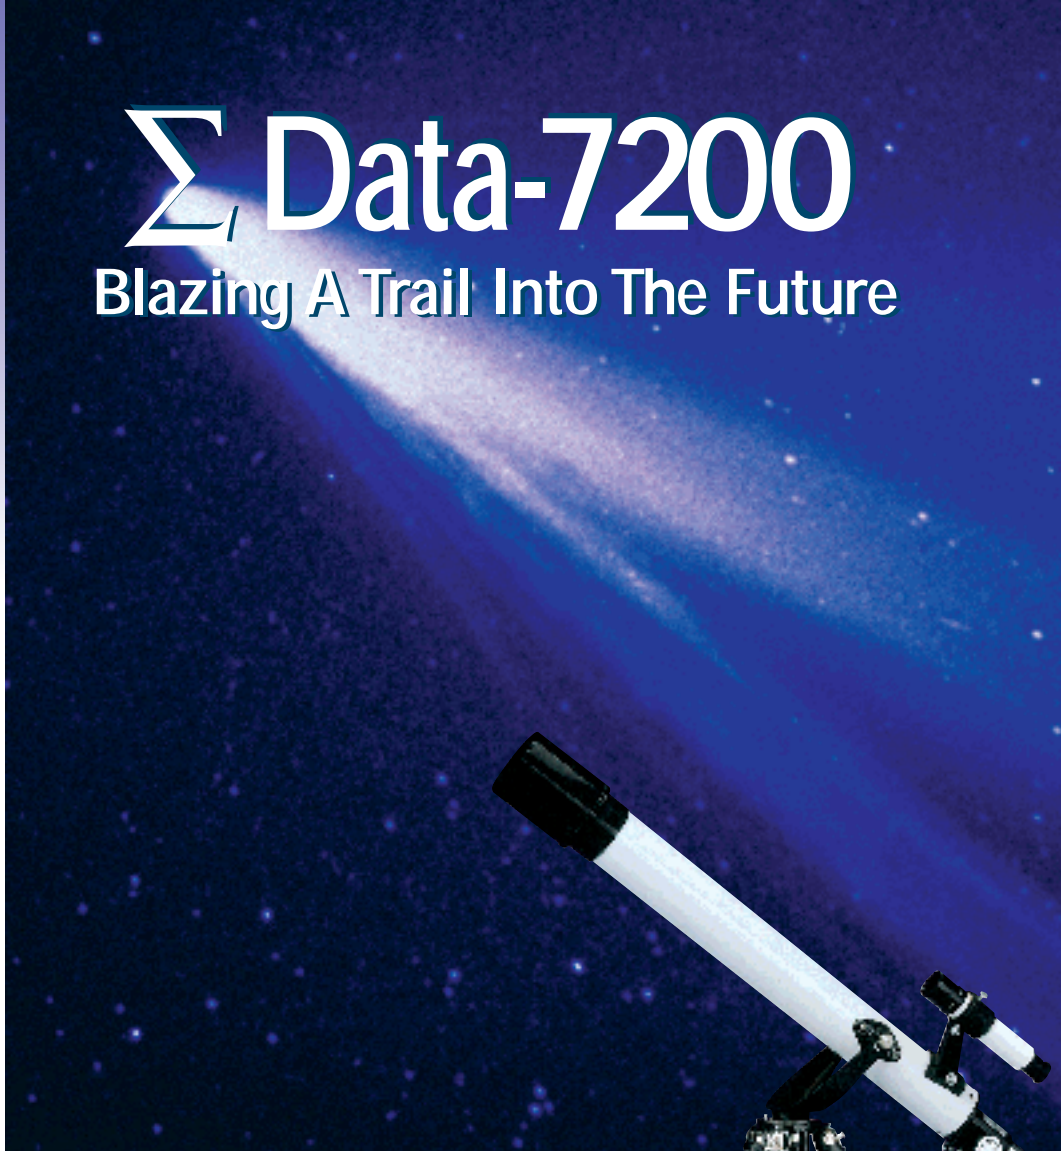

Sigma Data-7200 ATB2 Printer

Introducing the newest addition to the AMT Datasouth family of desktop printers, Σ DATA-7200 — it takes you beyond the ordinary. Ideally suited for travel agencies, satellite ticketing, airline ticketing offices and airport check-in counters.

- Affordable**
- Low Price Point
- Flexible**
- Direct Thermal & Thermal Transfer Models Available
 - Front Revalidation Slot
 - Two Secured Input Bins with Optional Third Bin
- Fast**
- 24 Coupons Per Minute, 3.9 IPS Print Speed
- Functional**
- Compact and Durable for Limited Space Areas



Encounter A New Age Of ATB2 Printers . . .

Sigma Data-7200 Features:

Sharp Thermal Print Technology	Σ DATA-7200 DT: Direct Thermal Σ DATA-7200 TT: Thermal Transfer with End and Near End Detection Adjustable Darkness Setting Simple Printhead Cleaning and Replacement
Fonts	OCR B Letter Gothic 5, 8, 10, 15, 17, 20, 22 cpi Double High, Bold
Speed	Print Speed 3.9 IPS 24 Coupons/Minute
Magnetics	IATA RP 1722 Resolution 722e Magnetics Four Tracks at 210 bpi Read, Write, Write Verify SCN Read
Document Handling	ATB1, ATB2, Continuous Fanfold Stock — (8 inch and 7 3/8 inch) Direct Thermal and Thermal Transfer Revalidation Front Feed Slot Bin 1: Internal Secured Bin with 500 Coupon Capacity Bin 2: Internal Secured Bin with 500 Coupon Capacity Bin 3: External Unsecured Feed Slot Allows 1000 Coupon Operation Output Bin: 100 Coupon Capacity with Bin Full Sensor
Flexible Communications	Input Port: DB25 RS-232C Output Port: DB25 RS-232C Baud Rates: 1200, 2400, 4800, 9600, 19200 Programmable Hardware and Software Serial Handshaking Fully Programmable Host Communication Protocols
Operations Panel	12 Keypad Functions Using 6 Keys with Tactile Feedback On Line, Data, Error, and Mode LEDs 2 x 16 LCD Display

Programming	AEA 94 PECTABS Minimum of 8 PECTABS in Non-volatile Memory
--------------------	---

OTHER SPECIFICATIONS INCLUDE:

Environment	Operating Temperature: 40°F to 104°F (5°C to 40°C) Operating Humidity: 20% to 90% Non-condensing ESD: Contact \pm 4kV, Air \pm 8kV
Compliance	FCC Class A, EN50081-1, EN50082, UL1950, CSAC22.2, EN60950
Power	Auto Voltage Select 85-132 or 170-265 VAC
Physical	Size: 21.6" x 8.3" x 14.9" (L x W x H) Weight: 35 Pounds
Options	STP Modem Package 1.5 MB ROM Upgrade .5MB Flash Upgrade
Consumables	5000 Coupon Thermal Transfer Ribbon (1 box includes 6 ribbons and one ribbon loader) Magnetic Head Cleaning Card Roller Cleaning Card Print Head Cleaning Kit

All products or brand names are registered trademarks of their respective holders. Specifications subject to change. Some models and features may not be currently available.

Specifications subject to change without prior notice.
Part No. 111093 Rev. B

AMT Datasouth

Corporate Headquarters
4765 Calle Quetzal, Camarillo, CA 93012
(805) 388-5799 PH
(805) 484-5282 FX

Charlotte Operation
4216 Stuart Andrew Blvd., Charlotte, NC 28217
(704) 523-8500 PH
(704) 525-6104 FX

AMT Datasouth International
Unit B, Pinnacle 15, Gowerton Rd, Brackmills
Northampton, NN4 7BW, England
+44 1604 763394 PH
+44 1604 760661 FX

<http://www.amtdatasouth.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>