

LIFETIME™ CORNER

Comfortable two person design with dual back support positions, integral seat and installed grab bar.

Model# 6060L (specify color)

- Acrylic with fiberglass reinforcement
- 2.1 HP self-draining pump/motor with dry run seal
- Ten flow adjustable jets including:
 - Two adjustable Ideal Flow Comfort Jets™
 - Eight adjustable Comfort Jets™
- Three silent air volume controls
- Side-mounted On/Off control
- Complete factory installed and tested whirlpool system
- **Includes E-Z-Install™ Whirlpool Heater**

Model# 6060LC (specify color)

- Same as above with the EverClean™ whirlpool system. The EverClean™ antimicrobial system incorporates AlphaSan®, a patented antimicrobial agent manufactured right into the circulation system components, which suppresses the growth of unsightly algae, fungus, mold and mildew.

Nominal Dimensions:

54-1/2" x 54-1/2" x 21-1/2"
(1384 x 1384 x 546mm)

Installed Size:

76-3/4" x 65-3/8" x 21-1/2"
(1949x 1661 x 546mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS



Components Needed:

- Bath Filler*: (specify finish)
- Bath Drain: 1583.470 (specify color)
OR 1599.500.020 (white only)


Custom Accessories Available:

- Corner Apron: CORNER-APRON (specify color)
- Tile Bead Kit: TILE-BEAD

* See American Standard Faucet Selector

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

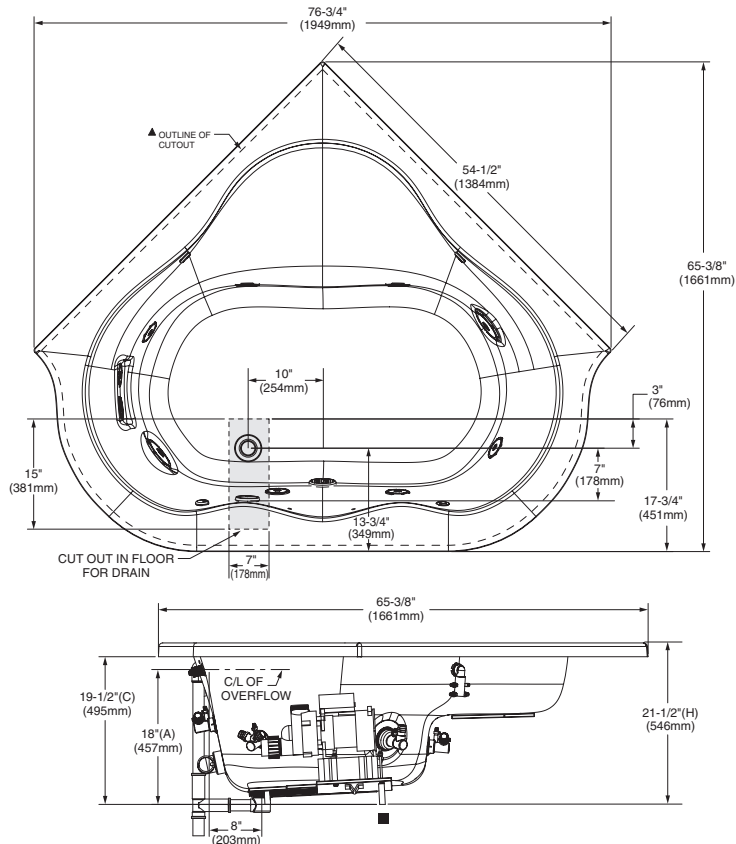

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

GENERAL SPECIFICATIONS FOR 6060L WHIRLPOOL	
INSTALLED SIZE	76-3/4 x 65-3/8 x 21-1/2 In. (1949 x 1661 x 546mm)
WEIGHT	108 Lbs. (49 Kg.)
WEIGHT w/WATER	824 Lbs. (374 Kg.)
GAL. TO OVERFLOW	86 Gal. (325 L)
WHIRLPOOL MIN. OPERATING VOL.	71 Gal. (269 L)
BATHING WELL AT SUMP	48 x 26-1/2 In. (1219 x 673mm)
BATHING WELL AT RIM	63 x 50 In. (1600 x 1270mm)
WATER DEPTH TO OVERFLOW	15 In. (381mm)
FLOOR LOADING (PROJECTED AREA)	24 Lbs./Sq.Ft. (116 Kgs./Sq.m)
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
PUMP	2.1 HP, 14.4 AMPS, 120V.
E-Z INSTALL WHIRLPOOL HEATER	12.0 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 2-WALL TILING BEAD KIT No.TILE-BEAD MUST BE ORDERED SEPARATELY.

▲ CUTOUT TEMPLATE PROVIDED IN SHIPPING BOX. MAY BE REQUESTED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

FITTINGS NOT INCLUDED, MUST BE ORDERED SEPARATELY.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>