




VP14 Vandal-Proof Speaker System

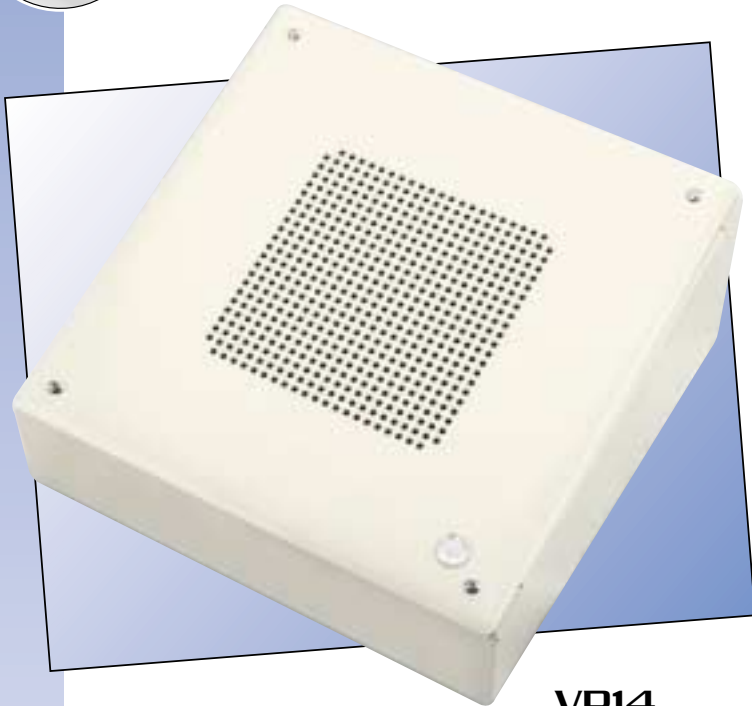

VP14


Features

- Attractive Design is Suitable for Use in a Variety of Surface-Mount Vandal Proof Applications
- Wire Mold 500 & 700 Series Compatible
- Durable All-steel Construction
- Impermeable Security Grille Protects Speaker
- Attractive Finish
- 9.5° Sloped Design Offers Directional Sound Projection
- Includes High-Quality 8" Loudspeaker with 25V/70.7V Line Transformer

Leave Would-be Perpetrators Powerless

The **VP14** vandal resistant, slanted wall mount baffle, finished in attractive, neutral beige, is ideal for use in high-security areas such as schools and correctional facilities. Its sturdy, 14-gauge baffle construction and specially designed protective labyrinth screen protects the enclosed speaker assembly against abuse. Each package contains a high-quality 8" diameter loudspeaker with a 10-ounce ceramic magnet complete with factory assembled 25V/70.7V transformer including four power taps (.5, 1, 2 & 4 Watts). The **VP14** exhibits a wide frequency response with low distortion.


More and more jobs in secured facilities are using surface mount raceways due to continual building expansions and retrofits. To accommodate for this, the **VP14** includes an adapter to comply with Wiremold 500 and 700 series conduit. This adapter can be installed securely through any of the standard $\frac{3}{4}$ " knockouts that are included on all four sides of the **VP14**. This provides for a cleaner installation where surface mount raceways are required. All knockouts are finished completely flush before the enclosure is painted making them invisible to any would-be perpetrator.

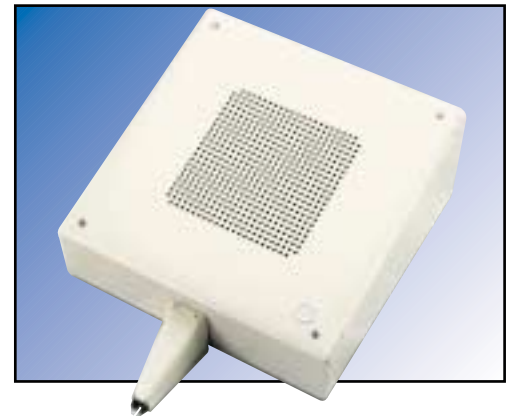

VP14

Shown with wire mold adapter included



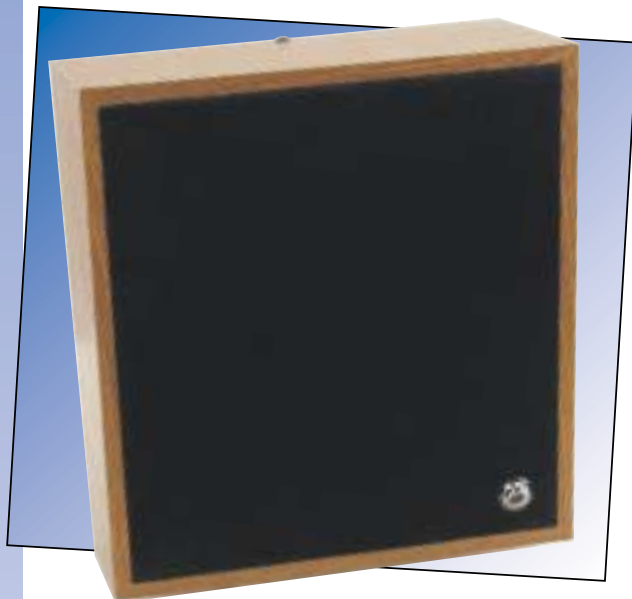

WD Series

Attractive surface mounting loudspeaker packages with 10 oz. magnet and choice of transformer are mounted in a sloped baffle with black fabric grille. Models with (V) suffix include volume control option

WD417-72 System

SPECIFICATIONS

Model	VP14	WD417-25	WD417-72	WD417-72V
SPEAKER TYPE	8" Dual Cone	8" Dual Cone	8" Dual Cone	8" Dual Cone
MAGNET WEIGHT	10 oz (226g)	10 oz (226g)	10 oz (226g)	10 oz (226g)
FREQUENCY RESPONSE	50Hz to 15kHz	50Hz to 15kHz	50Hz to 15kHz	50Hz to 15kHz
SENSITIVITY (1W/1M)	96dB	96dB	96dB	96dB
WATTS-PROGRAM	15	15	15	15
TRANSFORMER	25V/70.7V	25V/70.7V	25V/70.7V	25V/70.7V
TRANSFORMER TAPS	1/2W,1W,2W, 4W	1/2W,1W,2W, 4W	1/2W,1W,2W, 4W	1/2W,1W,2W, 4W
50 OHM POT	No	No	No	Yes
BAFFLE MATERIAL	14 Gauge CRS	NA	NA	NA
ENCLOSURE MATERIAL	16 Gauge CRS	MDF	MDF	MDF
FINISH	"Wiremold" Beige	Simulated Oak	Simulated Oak	Simulated Oak
DIMENSIONS:				
LENGTH (Rear of Enclosure)	11.4" (290mm)	10.47" (266mm)	10.47" (266mm)	10.47" (266mm)
WIDTH	11.75" (298mm)	9.48" (241mm)	9.48" (241mm)	9.48" (241mm)
HEIGHT (Bottom of Enclosure)	2.876" (73mm)	3.75" (95mm)	3.75" (95mm)	3.75" (95mm)
HEIGHT (Top of Enclosure)	5.29" (134mm)	5.43" (138 mm)	5.43" (138 mm)	5.43" (138 mm)

• **Five Year Limited Warranty** •



1601 Jack McKay Blvd.
Ennis, TX 75119
AtlasSound.com
Tech Support 800.876.3333

Printed in the USA
Specifications are subject to change without notice.

©Atlas Sound LP. Atlas Sound is a trademark of Atlas Sound LP. All rights reserved.

484202

000302

ATS001154 RevA 3/02

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>