

PNRQ20F/PNRQ21L GE Profile™ Reverse Osmosis Filtration System

Dimensions and Installation Information (in inches)

Note: R.O. System can be installed up to 30 feet from point-of-use/faucet.

Note: Can be installed under counter (as shown), in basement, or other convenient location. Before installing, see installation instructions packed with product for complete details.

Replacement Membranes, Pre- and Post-Filters

Call SmartWater Services, toll-free, 800.952.5039 for convenient ordering.


Caution: Do not use with water that is microbiologically unsafe or of unknown quality, without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. This reverse osmosis unit contains a replaceable membrane cartridge treatment component critical for effective removal of Total Dissolved Solids. The water should be tested periodically to verify that the system is performing satisfactorily.

GE Reverse Osmosis Model PNRQ20F/PNRQ21L Series are tested and certified to NSF/ANSI Standard 58 for the reduction of claims specified on the Performance Data Sheet.

See Performance Data Sheet for details.

NSF approved

NSF is the most highly recognized independent testing institution in the water treatment industry. NSF inspects our manufacturing facilities, structurally tests our product, tests our product to make sure nothing harmful is added to the water, and certifies our product performance as specified on the performance data sheet (inside the product box).

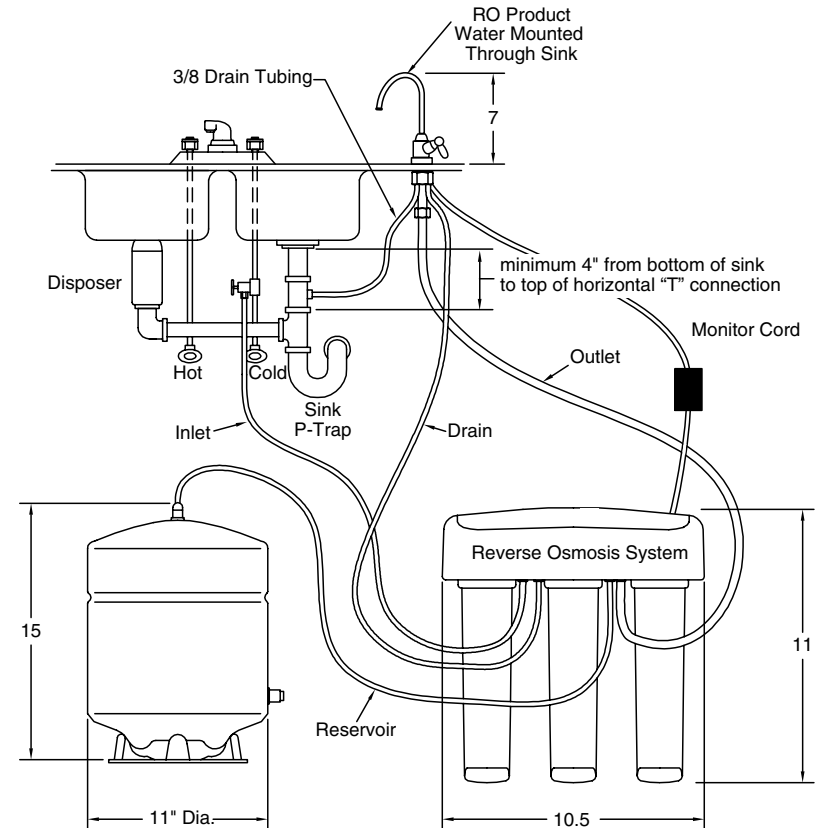


For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



PNRQ20F/PNRQ21L GE Profile™ Reverse Osmosis Filtration System

Features and Benefits

- Premium filtration process
- Twist and Lock design
- Advanced Monitoring System
- Filter and membrane reminder lights
- Super 15.5 daily production rate
- Designer-style high-arc chrome, white, black, bisque, brushed nickel or oil-rubbed bronze faucet
- Faucet, filters, membrane, storage tank and full installation kit included
- 2.4-gallon storage tank (at 50 psi)
- Quick Connect fittings
- PNRQ20FBL
- PNRQ20FCC
- PNRQ20FWW
- PNRQ20FBB
- PNRQ21LBN
- PNRQ21LRB

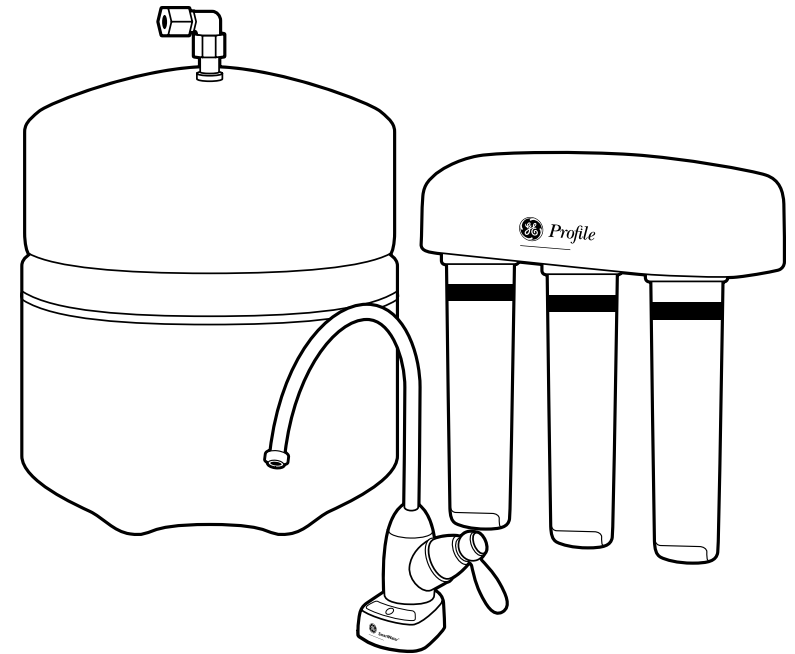

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>